

Cornelius V-Series Equipment Shutdown Procedures ~Customer~



Purpose

Purpose of this document is to provide you with the suggested basic steps required for you to successfully power/shutdown your ICEE machine. We will also include some supplemental steps that you can include with your basic shutdown but **ONLY** if you are able to access them.

Basic Shutdown

Turn off barrels (2 or 4)

1. Open merchandiser up to access the units display. If in "normal" operation, the words "ON 1" and "ON 2" will Alternate along with a friendly message. Fig. 1
2. Push "OFF" push buttons for both side 1 and side 2. Display will now alternate "OFF 1 and "OFF 2" Fig. 2
3. Finally, you will need to press BLEND ON/OFF shown in Fig. 3 for side 1 and side 1 until BLEND OFF 1 and 2 are displayed along with OFF 1 and OFF 2.

*****NOTE*** The process is the same for 2- or 4-barrel units**



Fig. 1



Fig. 2

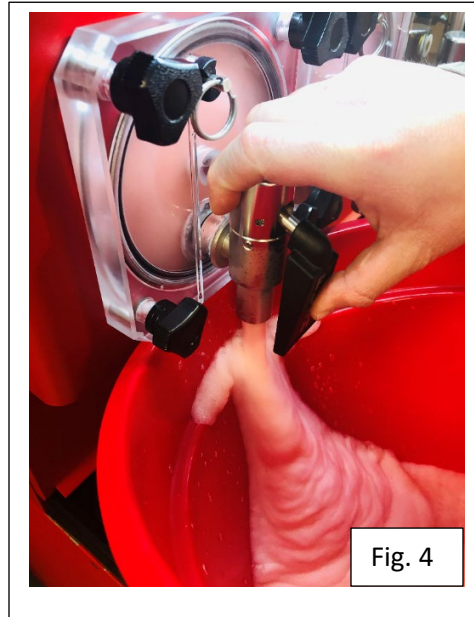


Fig. 3

*****NOTE*** If buttons on keypad are unresponsive, press and hold Menu/Select button until you hear a beep.**

Depressurize Barrels

1. Obtain a suitable bucket or large container
2. Place under each nozzle.
3. Hold nozzle open to dispense product from barrel (Fig. 4) and continue dispensing until only CO2 is dispensing. Continue this step for each barrel.
4. Please refer to supplemental steps below to turn off CO2 to the unit. Once off, repeat purging of each barrel until no CO2 comes out.




Supplemental Steps

Turn off supplies to the unit


1. Pictured here in Fig. 5 are shutoff valves for water/Syrup/Co2
2. Turn each valve handle until it is perpendicular to the valve as shown here. Normally the valve handle is in line with the valve and tubing.

*****NOTE*** Not all shutoffs will look like this one pictured. Follow the tubing out the back of unit until shutoffs are located.**

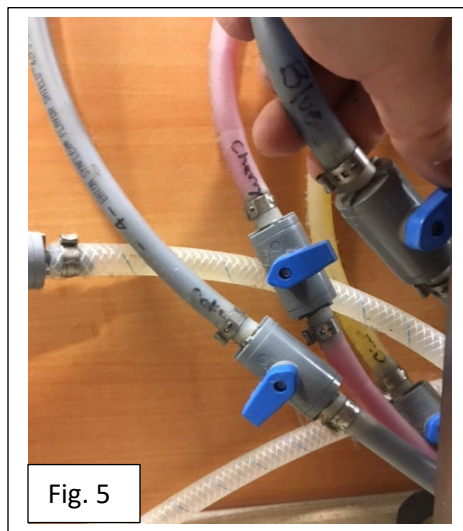


Turn off Bulk CO2 Tank

1. Locate bulk tank. Typically it will look similar to this one pictured here in Fig. 6. It can be either outside or inside. Inside it can be found in the back room and outside can be on either side of the building or in the back and potentially in a small outbuilding.
2. Locate the valve to shut off the CO2 valve as shown here in Fig. 7

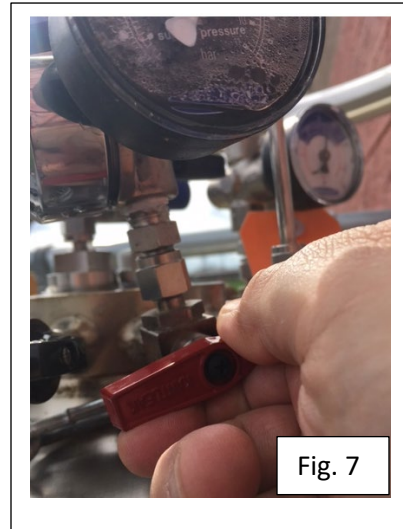

Unplug Unit

1. Typically the plug for each unit, shown here in Fig. 8 is plugged in directly behind the unit or in the cabinet below the unit on the back wall.
2. This is a “twist-lock” style plug. Firmly grasp the plug and turn “counterclockwise until it stops, then pull straight out.
3. An alternate would be to turn off the breaker if it is labeled and you knew the location.

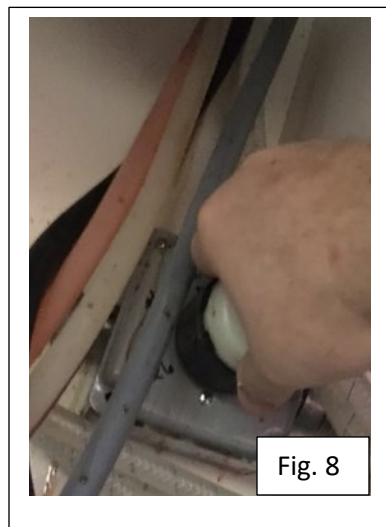

Sanitize

1. Take your spray bottle of sanitize and spray and wipe down front around faceplates and faucets/handles and as well empty/clean drip tray.