

# Cornelius Viper Equipment Shutdown Procedures ~Customer~



## Purpose

Purpose of this document is to provide you with the suggested basic steps required for you to successfully power/shutdown your ICEE machine. We will also include some supplemental steps that you can include with your basic shutdown but **ONLY** if you are able to access them.

## Basic Shutdown

### Turn off barrels

1. Lift merchandiser up to access the units display. If in “normal” operation, the word “FREEZE” will appear for each barrel # as shown in Fig. 1
2. Select appropriate barrel to turn off by pushing arrow down or up until appropriate barrel is selected. Note that each barrel will be highlighted.
3. For each barrel selected push “OFF” button. Display will read “OFF” if successful.
4. Continue this until all barrels read “OFF”

**\*\*\*NOTE\*\*\* The process is the same for 2, 3, or 4-barrel units.**

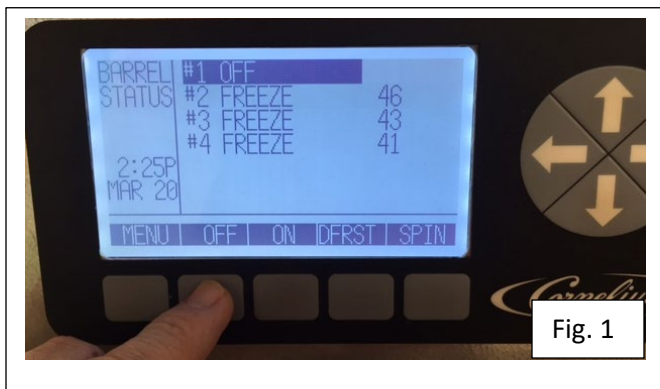



Fig. 1



Fig. 2

### Depressurize Barrels

1. Obtain a suitable bucket or large container
2. Place under each nozzle.
3. Hold nozzle open to dispense product from barrel and continue dispensing until product stops shown here in Fig. 3
4. Continue steps for each barrel.

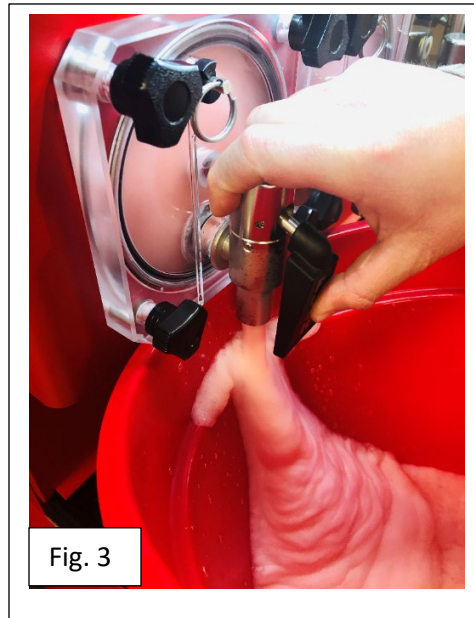


### Supplemental Steps

#### **Turn off supplies to the unit**



1. Pictured here in Fig. 4 are shutoff valves for water/Syrup/Co2
2. Turn each valve handle until it is perpendicular to the valve as shown here. Normally the valve handle is in line with the valve and tubing.

**\*\*\*NOTE\*\*\* Not all shutoffs will look like this one pictured. Follow the tubing out the back of unit until shutoffs are located.**

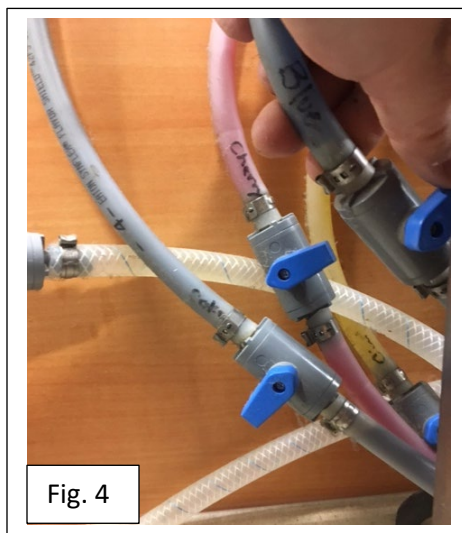


### Turn off Bulk CO2 Tank

1. Locate bulk tank. Typically it will look similar to this one pictured here in Fig. 5. It can be either outside or inside. Inside it can be found in the back room and outside can be on either side of the building or in the back and potentially in a small outbuilding.
2. Locate the valve to shut off the CO2 valve as shown here in Fig. 6

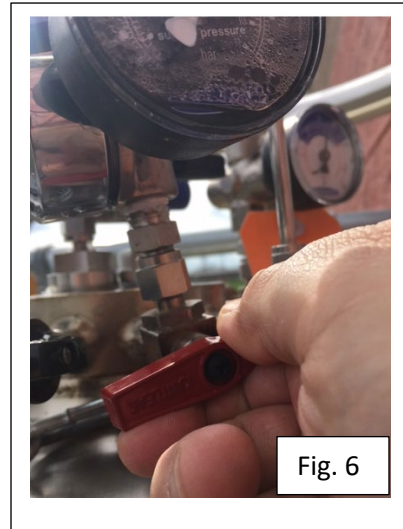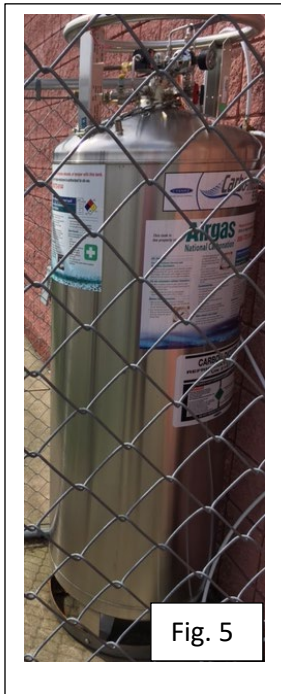

### Unplug Unit

1. Typically the plug for each unit, shown here in Fig. 7 is plugged in directly behind the unit or in the cabinet below the unit on the back wall.
2. This is a "twist-lock" style plug. Firmly grasp the plug and turn "counterclockwise until it stops, then pull straight out.
3. An alternate would be to turn off the breaker if it is labeled and you knew the location.

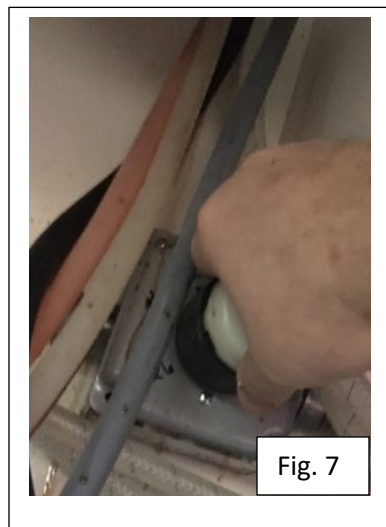

### Sanitize Faucet/Handles

1. Take your spray bottle of sanitze and spray and wipe down front around faceplates and faucets/handles.